




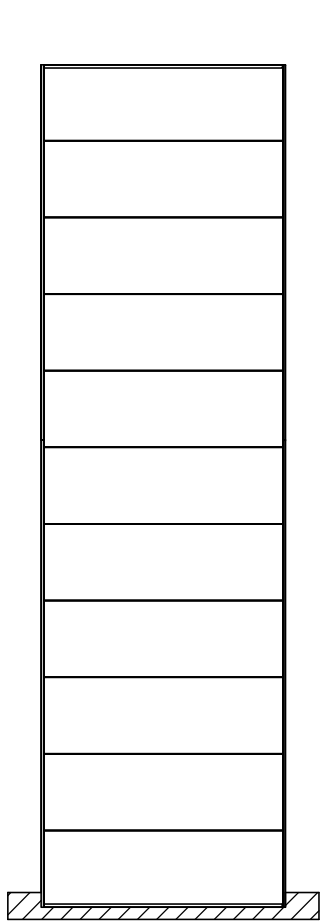


Side C

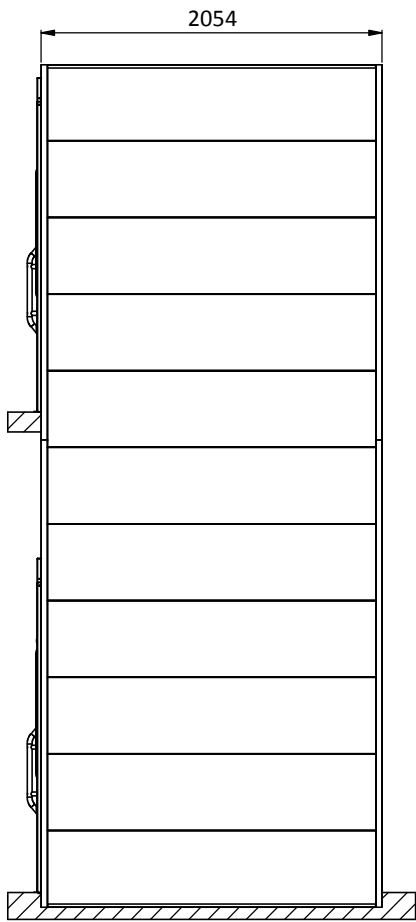

Side B

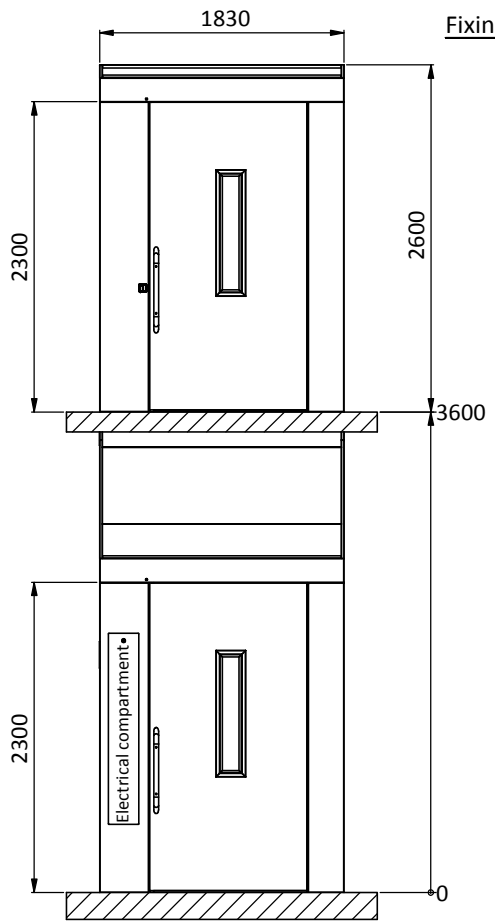

Side A

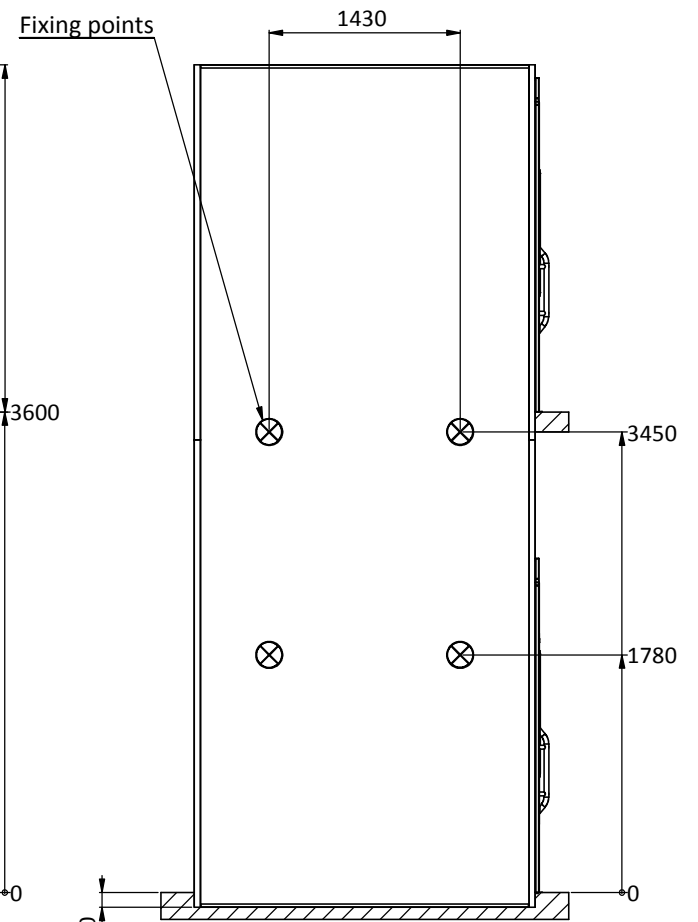

Side D




| Product                                                           | Drawn | Checked | Date            | Customer  |
|-------------------------------------------------------------------|-------|---------|-----------------|-----------|
| ILS 1K                                                            | TS    | LG      | 2014-03-04      |           |
| Title<br>Principal 2 stop special height doors                    |       |         |                 |           |
| Innovation Lift Scandinavia AB<br>Kranvägen 6<br>693 33 Degerfors |       |         | Document Number | -Revision |
| Principal 1                                                       |       |         |                 | -03       |

Hook in the building ceiling  
for 500 kg, by builder


400 V, 3-phase, 16A slow,  
Cable Area min 2,5 mm<sup>2</sup>

400 V, 3-phase, 16A slow,  
Cable Area min 2,5 mm<sup>2</sup>

Overall dimensions

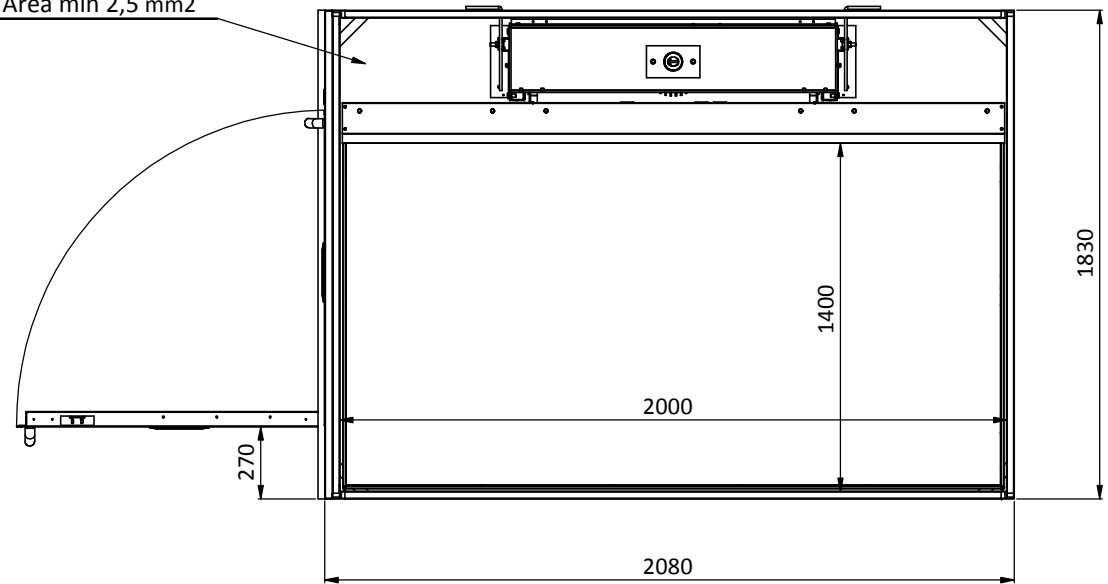

Cut out sizes

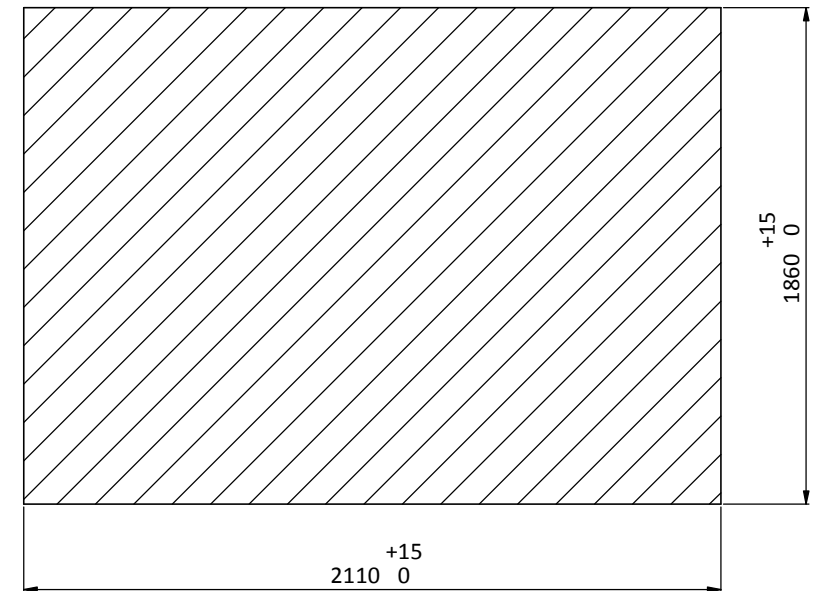

| Product                                                           | Drawn | Checked | Date            | Customer  |
|-------------------------------------------------------------------|-------|---------|-----------------|-----------|
| ILS 1K                                                            | TS    | LG      | 2014-03-04      |           |
| Principal 2 stop special height doors                             |       |         |                 |           |
| Innovation Lift Scandinavia AB<br>Kranvägen 6<br>693 33 Degerfors |       |         | Document Number | -Revision |
| Principal 1                                                       |       |         |                 | -03       |