

Wall mounted call stations  
2 button plus key locking included

Black Framework


**NOTES:**

Solid base required for lift to sit on. Level across whole aperture.

Base to support the forces for each leg. See notes below


240v 50hz Dedicated Single phase power supply terminating in a wall mounted fused spur or lockable rotary isolator

Lift running face to be smooth and at 90 degrees to base

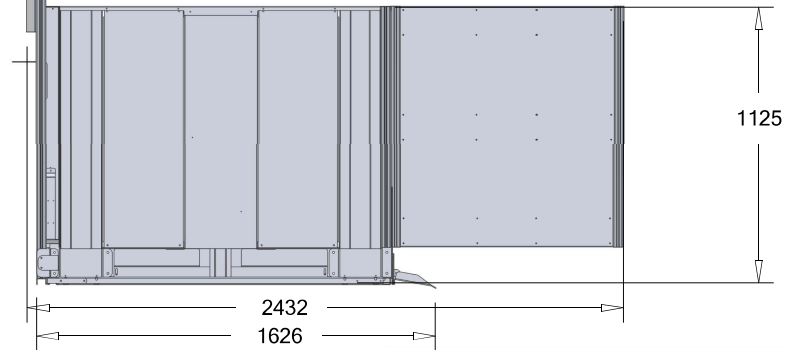

Minimum height from floor to platform 37 mm

Minimum width for installation 1357mm

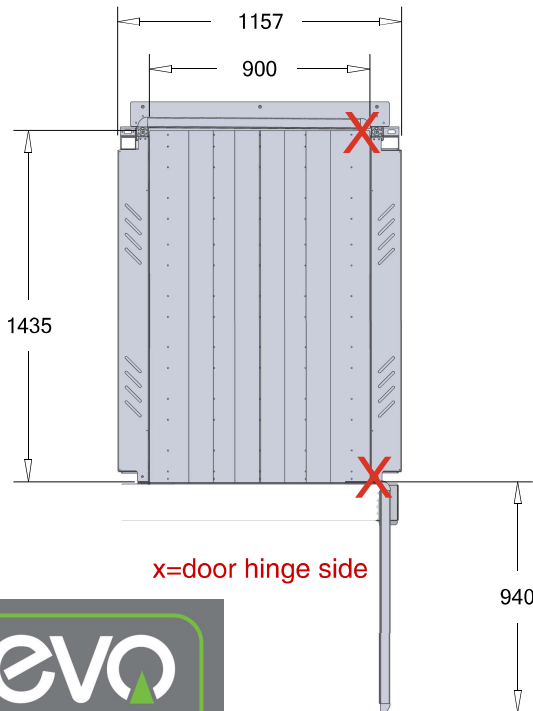

x=door hinge side

Travel Height 1200



Max 1500mm

Forces Downwards 1.8kn per leg.

Max load 400Kg

Voltage 230/110/ V 50Hz

<b>Project Name</b>	Platform 900mm x 1400mm		Client Approval Signature		
<b>Project Ref No.</b>	4L				
<b>Drawing No.</b>	M4	90016348 revision 1			
<b>Revision</b>		<b>Date</b>	19/09		
<b>Model</b>	Tech Lift M4			<b>Date</b>	08/11/2024
<b>Entrance Configuration</b>	A	All Rights Reserved Tech Line AB	<b>Scale:</b>	1:30	
	All dimensions in mm				

